


Phonon collection efficiency of Z7

Zhiheng Li · University of Minnesota · SuperCDMS SNOLAB Run 4 · September 2026
github.com/ZhihengLi0/urop → [snolab/collection_efficiency/](#)

The question

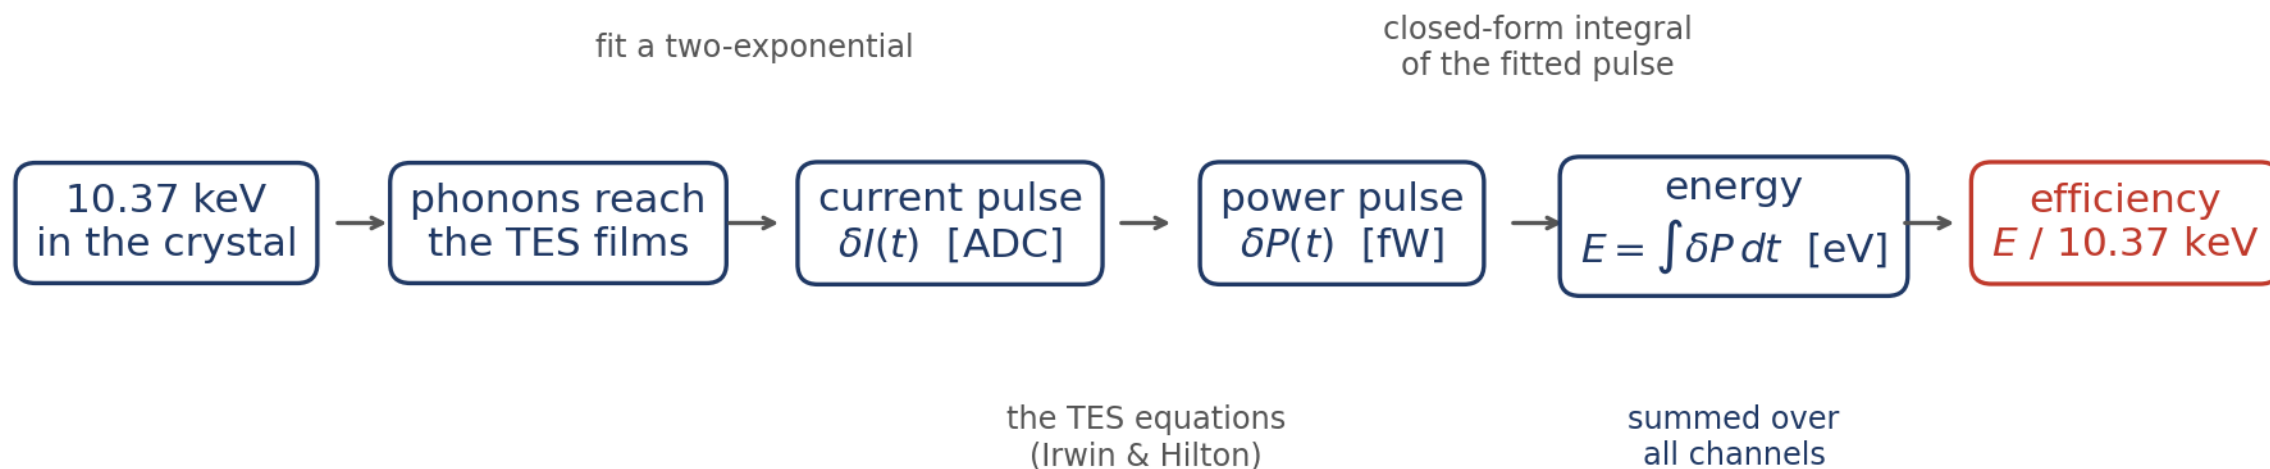

For detectors operated at 0 V (no NTL effect):

Collection efficiency = energy absorbed by the TESs, summed over all channels $\div$ the 10.37 keV of the event

Sample: Z7, the K-line events of the Ge activation run, from SNOLAB R4 (2207 events, 30 series, all 11 channels).

The formula, and the two numbers it needs

Method 1 of the CDMS collection-efficiency note

$$\delta P(t) = I_0 (R_L - R_0) \delta I(t) + 2 R_L (\delta I(t))^2$$

linear term

quadratic term

$$E = \int \delta P(t) dt = I_0 (R_L - R_0) A (\tau_f - \tau_r) + 2 R_L A^2 \left(\frac{\tau_f + \tau_r}{2} - \frac{2 \tau_f \tau_r}{\tau_f + \tau_r} \right)$$

for the fitted pulse $\delta I(t) = A [e^{-t/\tau_f} - e^{-t/\tau_r}]$ integrated from $-\infty$ to $+\infty$: zero before it starts, decays to zero after

Z7 PBS1 bias point (measured, from detectorConfig): $I_0 = -18.07 \mu\text{A}$, $R_0 = 44.16 \text{ m}\Omega$, $R_L = R_p + R_{sh} = 19.24 \text{ m}\Omega$


$$\Rightarrow I_0 (R_L - R_0) = 0.45 \mu\text{V} \quad \text{and} \quad 2 R_L = 0.0385 \Omega$$

δP = the change of Joule heating when the current moves by δI : a linear term and a small quadratic term.

The note also gives Method 2. In our sign convention it reads $\delta P = I_0 (R_L - R_0) \cdot \delta I - R_L \cdot (\delta I)^2$: the same linear term, only the quadratic term differs, and it gives 1.7 % less energy (PBS1, median of 15 events).

Example: one pulse


Z7 PBS1, event 30646: the same trace as ADC counts, as current, as power

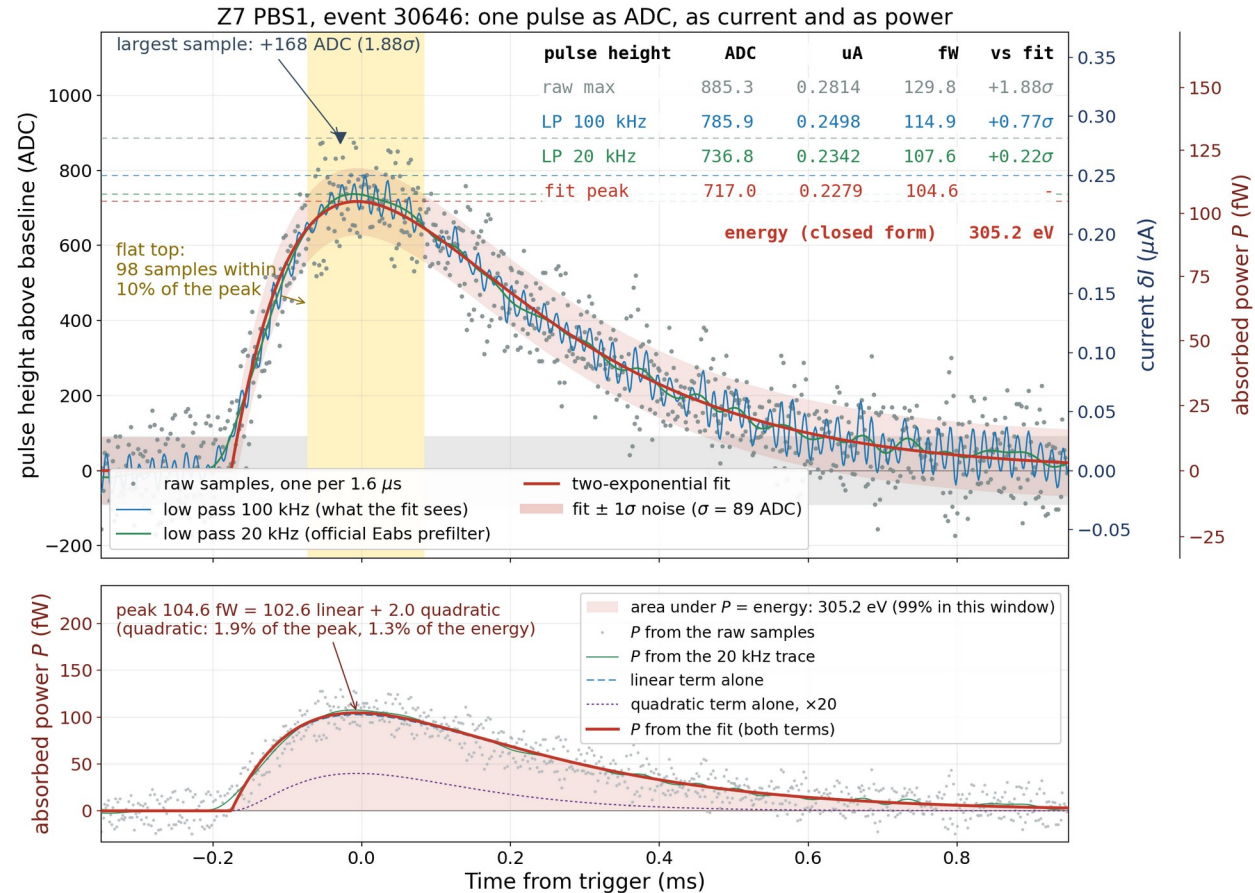

baseline = mean of bins 93-15758 = 28667.7 ADC, subtracted | 1 ADC = 0.3179 nA
 $P = I_0(R_L - R_0)\delta I + c_2 R_L \delta I^2$ (method1, $c_2=2$): $I_0 = -18.069 \mu$ A, $R_0 = 44.159$ m Ω , $R_L = 19.240$ m Ω
 $\Rightarrow 0.45 \mu$ V and 0.0385Ω

The two-exponential is fitted to the 100 kHz low-passed trace (blue), not to the raw samples; the raw samples are only drawn.


The height: take it from the fit, not from the largest sample

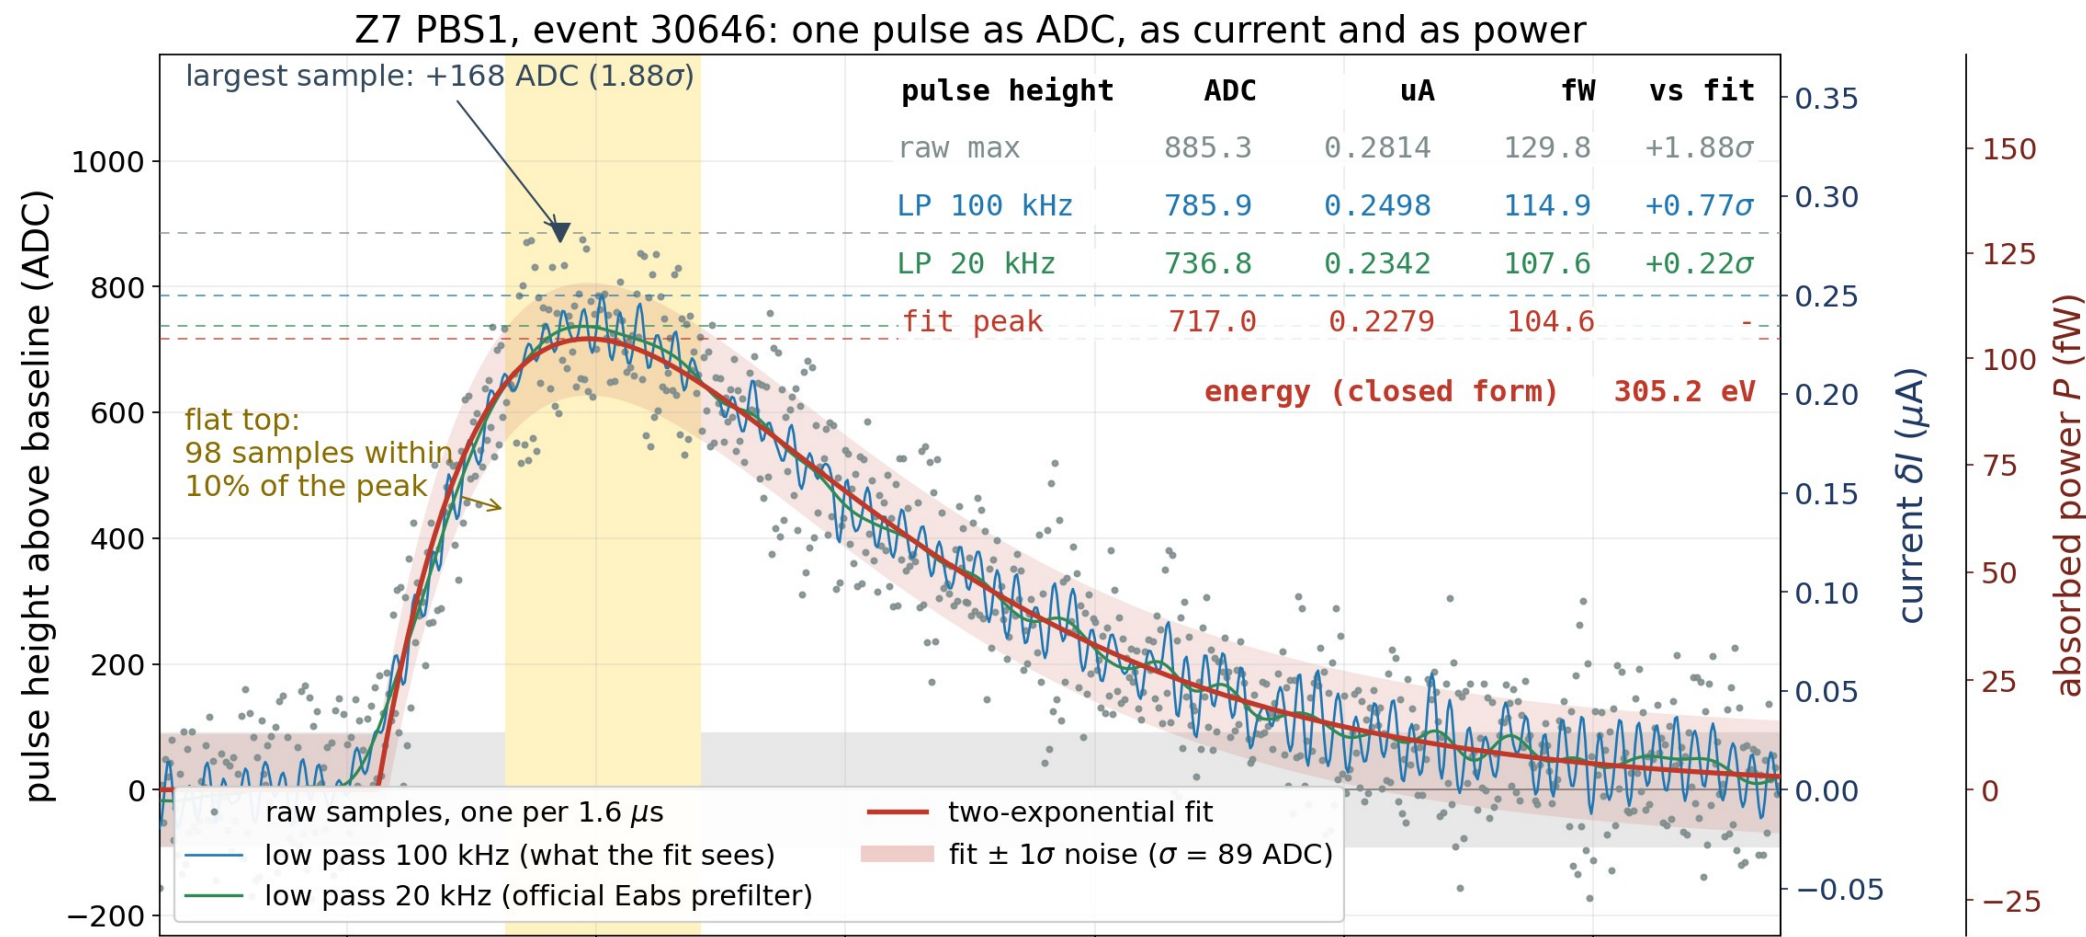

Yellow band: 98 samples sit within 10 % of the peak. The largest of them is the largest noise excursion.

Largest raw sample 885 ADC, fit 717 ADC: the maximum reads 23 % high. Filtering helps; the fit removes it.

The power pulse, and its area is the energy

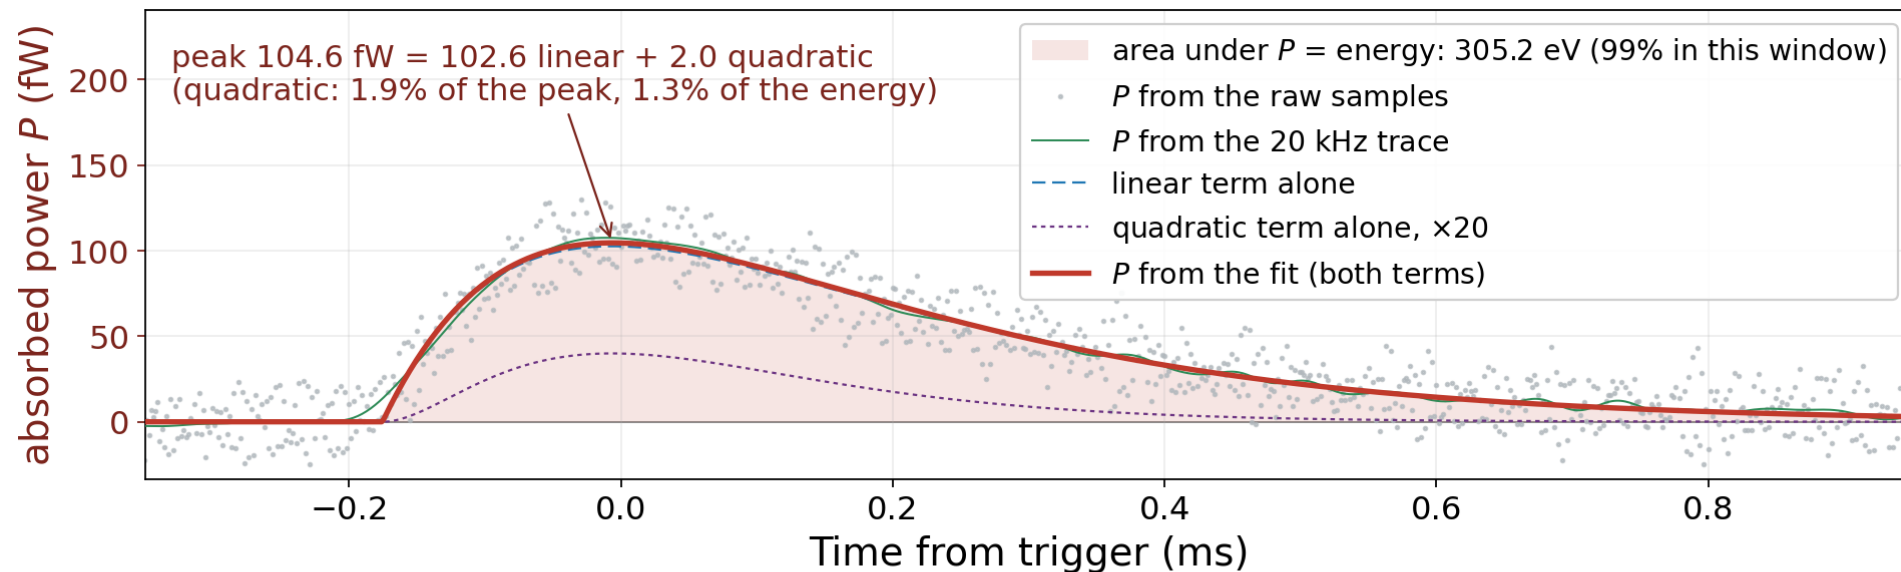


baseline = mean of bins 93-15758 = 28667.7 ADC, subtracted | 1 ADC = 0.3179 nA
 $P = I_0(R_L - R_0) \delta I + c_2 R_L \delta I^2$ (method1, $c_2=2$): $I_0 = -18.069 \mu\text{A}$, $R_0 = 44.159 \text{ m}\Omega$, $R_L = 19.240 \text{ m}\Omega$
 $\Rightarrow 0.45 \mu\text{V}$ and 0.0385Ω

Red: the fitted current put through the formula. Blue dashed: the linear term alone. Purple: the quadratic term, $\times 20$.

The quadratic term is 1.9 % of the peak — the power pulse has the shape of the current pulse.

The shaded area is the energy this channel absorbed: 305 eV.

Why the fitted pulse is integrated, and not the data

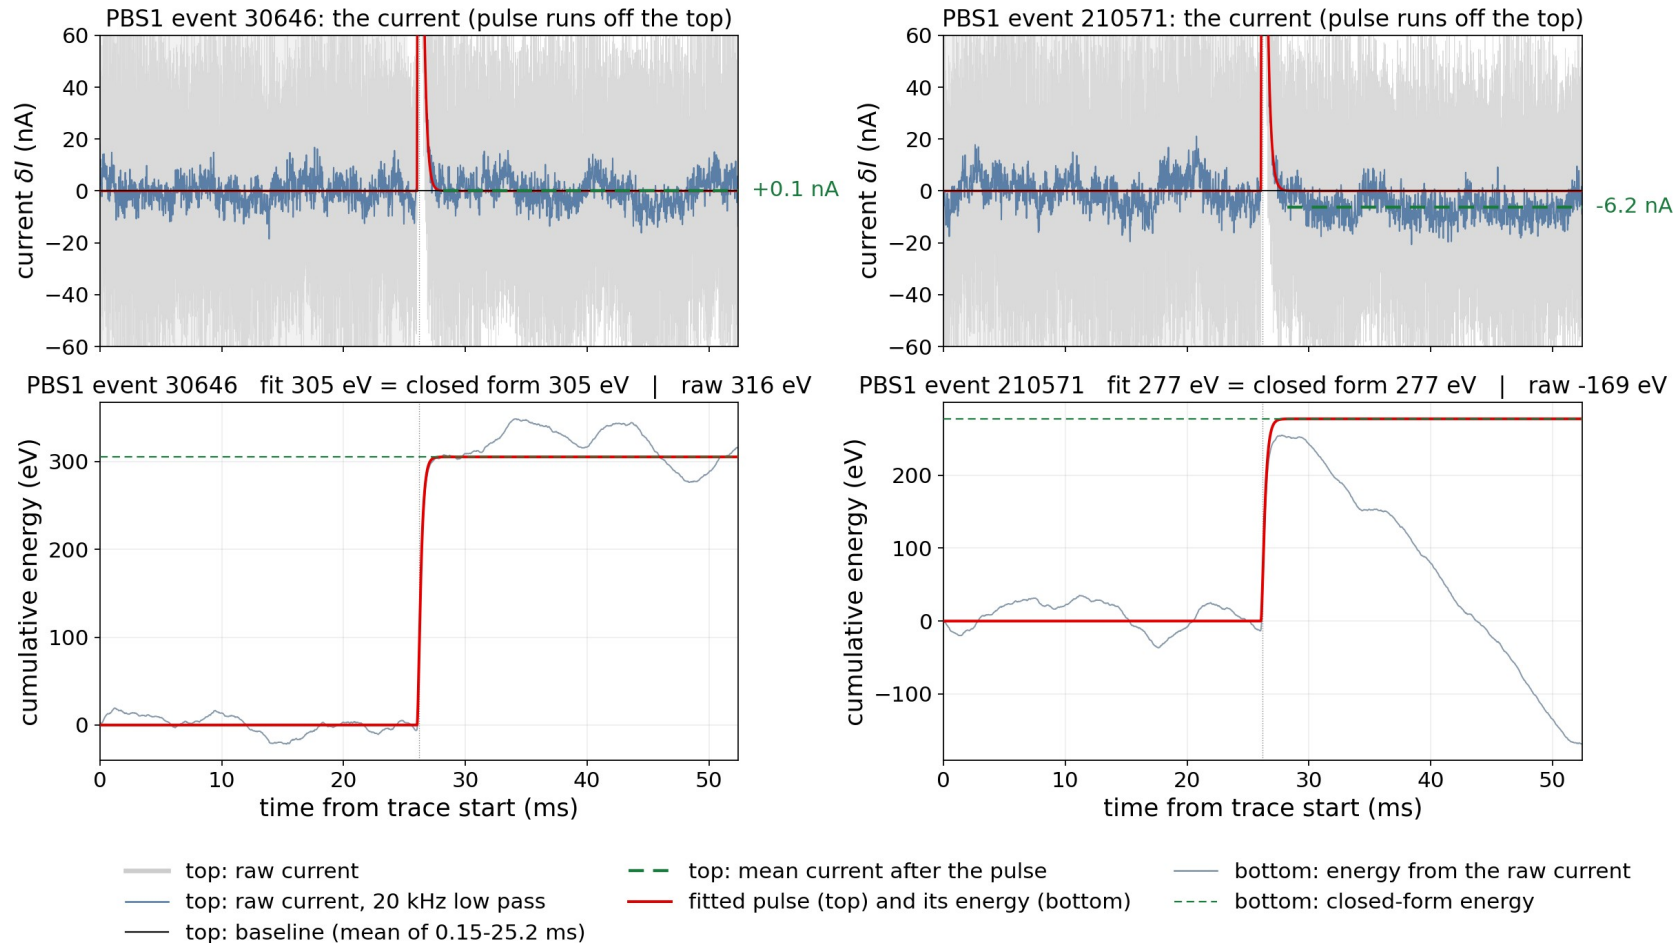


Top: the raw current of the same two events, zoomed on the baseline. Bottom: the energy accumulated from it (grey) and from the fit (red).

Right: after the pulse the current sits 6 nA below its baseline — hidden in 28 nA of noise, yet over 24 ms it is -420 eV: raw -169 eV, fit 277 eV.

The same event in its other channels: they add up to 33 %

Z7 event 30646; four of the eleven channels

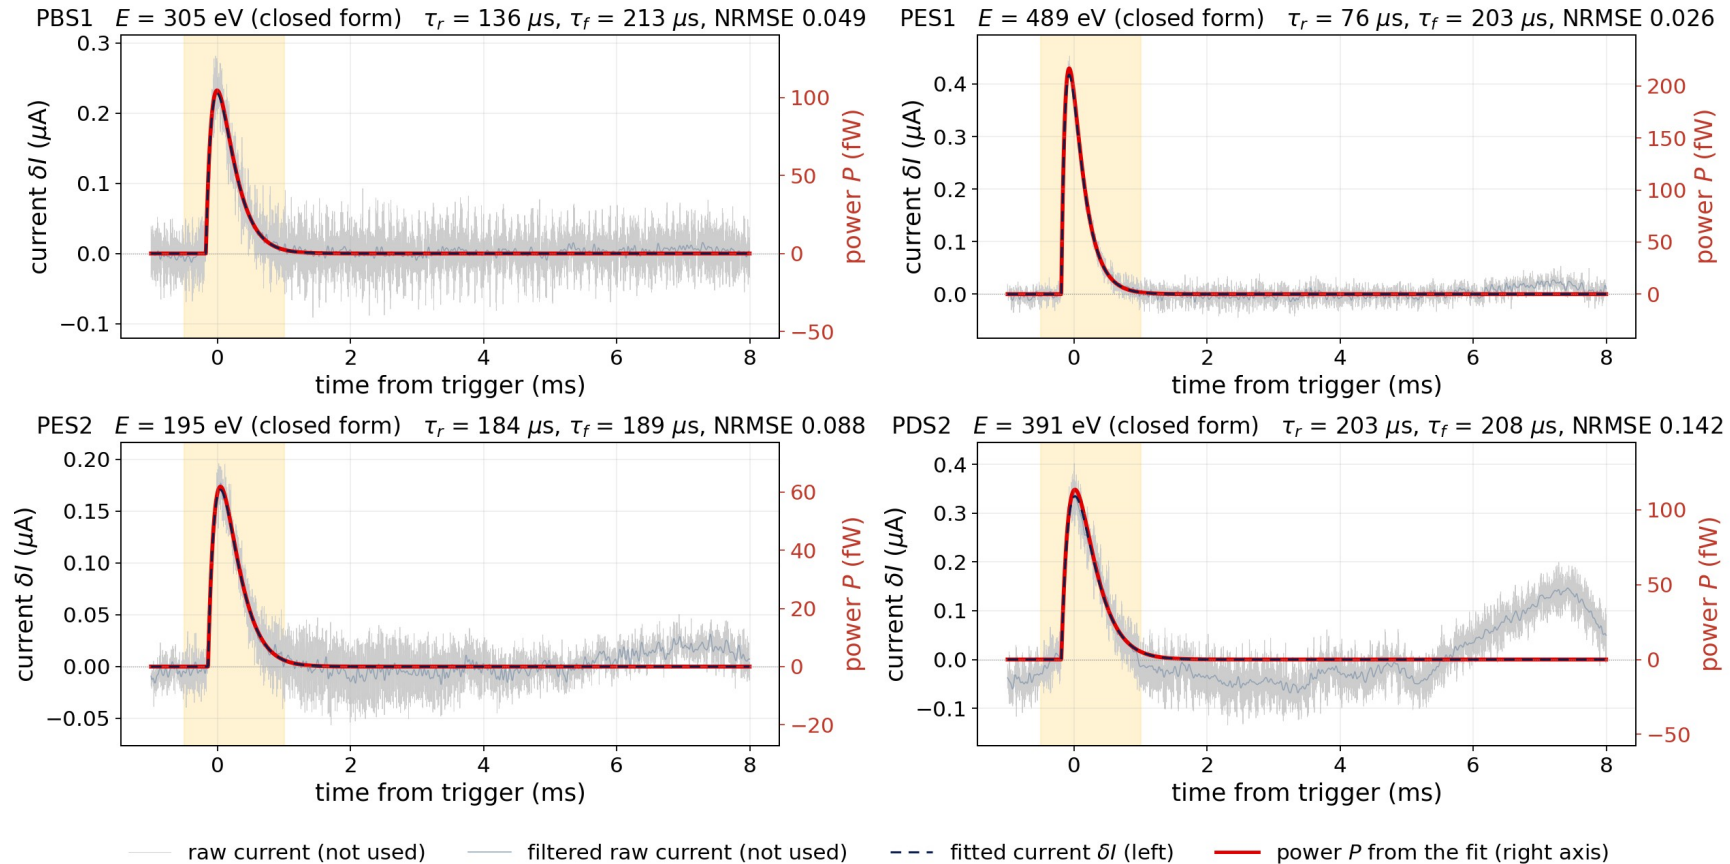


The channels share the energy unevenly (PES1 489 eV, PES2 195 eV): the event sat closer to one side.

Summed over the eleven channels: 3419 eV = 33.0 % of 10.37 keV. PDS2 (bottom right) carries a slow swing.

Now every event: one channel gives a wide, lopsided distribution

PBS1, 1917 K-line events, one fit and one integral each

Z7 PBS1: energy of every K-line event (1917 events, 30 series)
two-exponential fit per event, closed-form power integral (method1)
fits with NRMSE > 0.2 dropped (290 events)

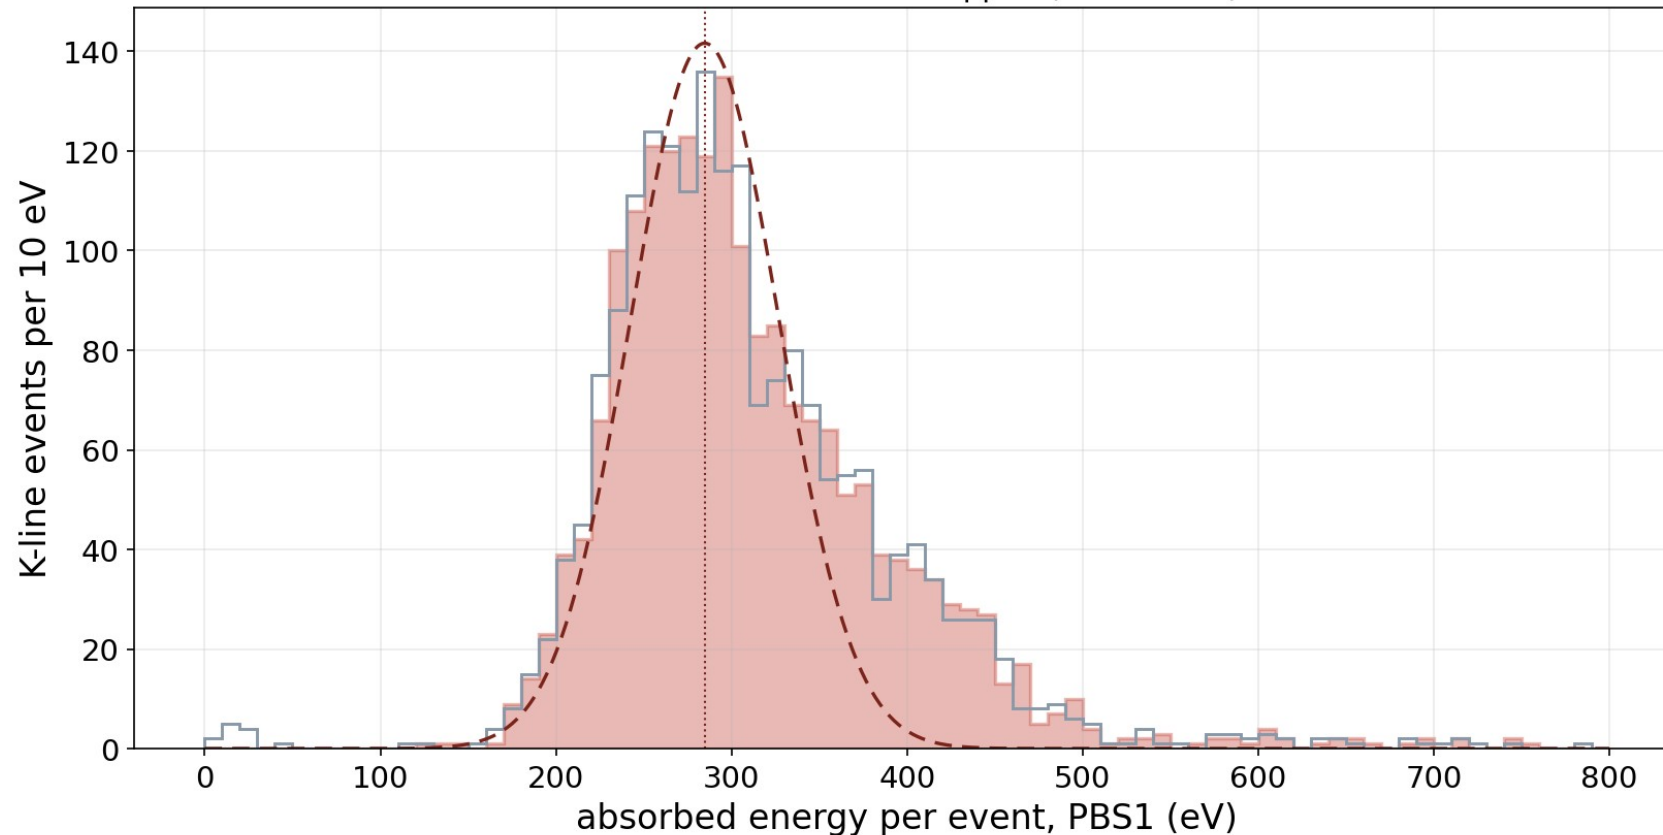

- official-window raw energy: $\mu = 284.2$ eV, $\sigma = 43.1$ eV (15.2%)
- fitted-pulse closed-form energy: $\mu = 284.8$ eV, $\sigma = 42.4$ eV (14.9%)
- Gaussian fit to the core

Red: from the fit. Grey: the official window on the raw trace. Same peak to 0.2 %.


Peak 285 eV, width 15 % — for a line whose energy is fixed.

The tail to the right is the events that happened near this channel.

One channel's width is event position, not noise.

Summed over the channels: 32 ± 1 %

the total energy the TESSs absorbed per K-line event

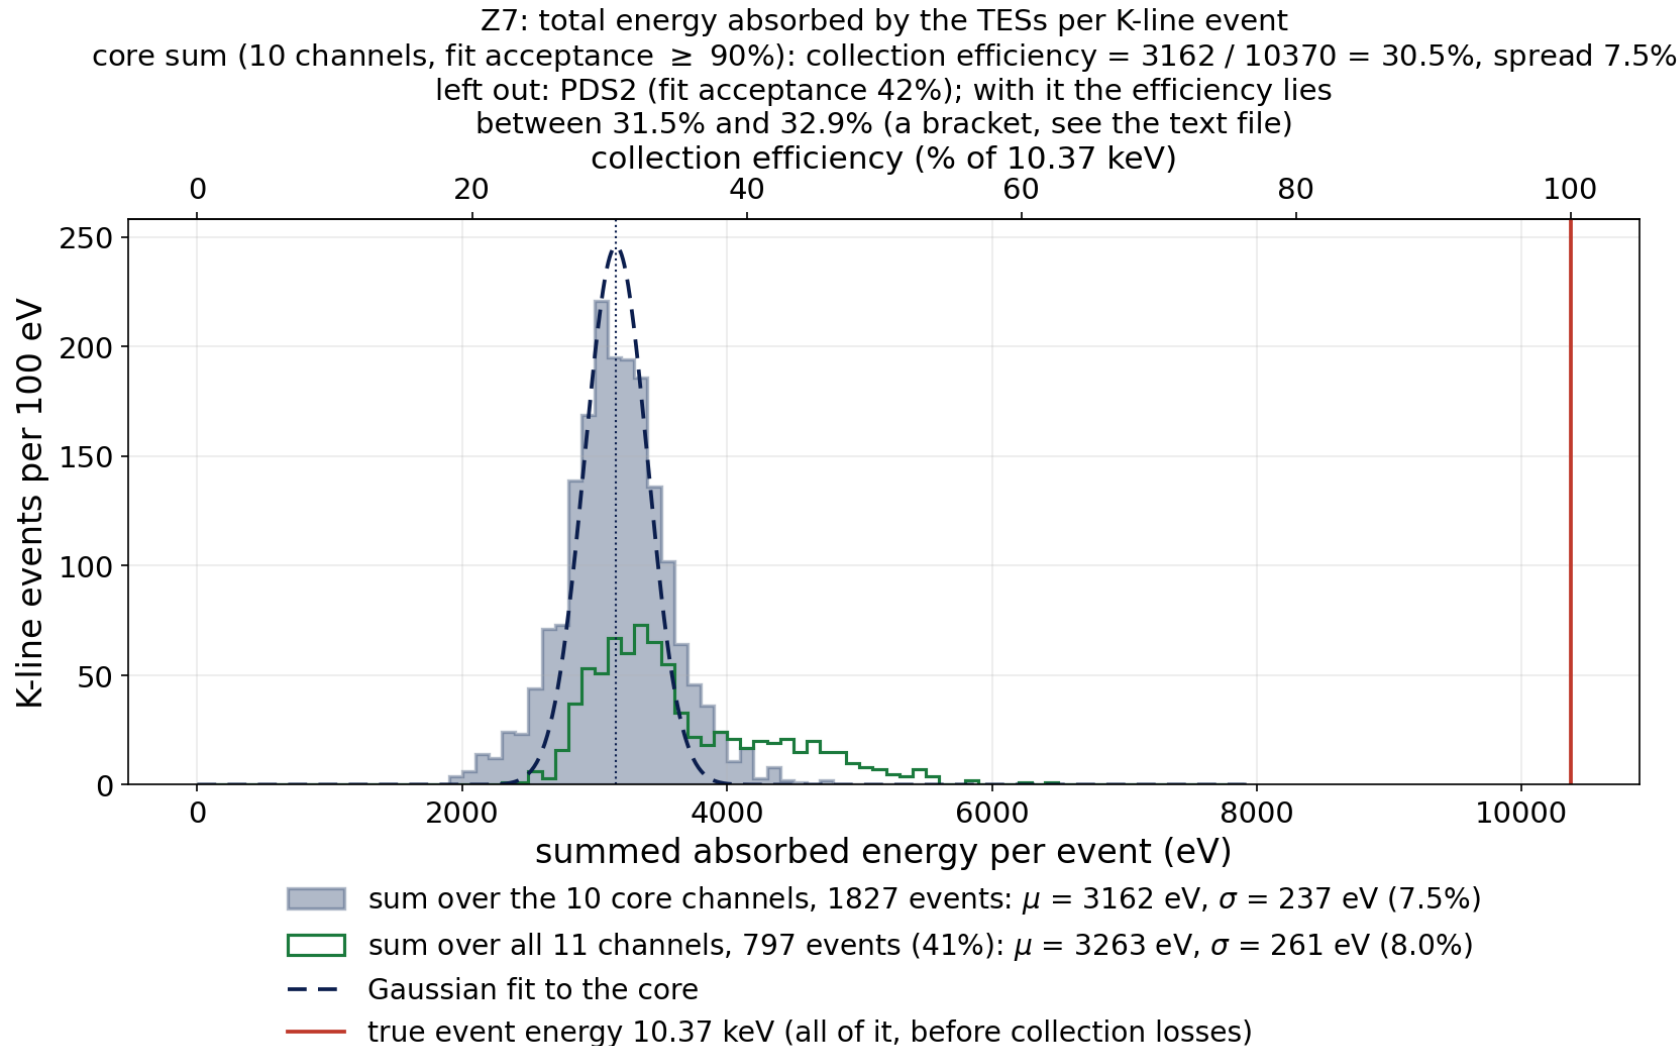

Ten channels summed, 1827 events: 3162 eV = 30.5 %, and the width drops to 7.5 % — the position effect cancels.

PDS2 fits only 42 % of the events (that slow swing), and those events are not typical; its share can only be bracketed.

Full efficiency 31.5–32.9 %: 32 ± 1 %.

Red line: 10.37 keV — two thirds of the energy never reaches the TESSs.

Summary, and what is still open

A current pulse becomes a power pulse through the TES equations; the area under the power is the energy. The quadratic term is 2 %.

The energy comes from the fitted pulse, integrated from $-\infty$ to $+\infty$: no bias from the noisy maximum, no drift.


One channel: 15 % wide and lopsided (position). Ten channels summed: 7.5 % and symmetric.

Z7 absorbs 32 ± 1 % of a 10.37 keV event in its TESs. The CDMS note on the R37 CUTE tower reports 26–41 %.

Open: Z7 only · the HV bias of Z7 is not established (0 V assumed) · no dI/dV , so the inductor term is dropped · PDS2 is the ± 1 % · 12.5 % of events fit in no channel and are not in the histograms.

Backup — the events

Z7: summed PTOFamps over 27 series, rebuilt from the Prompt processing with no cut applied
the note's version of the same plot rejects SumPF/PT below 0.1; the difference between the two curves is what that cut removes

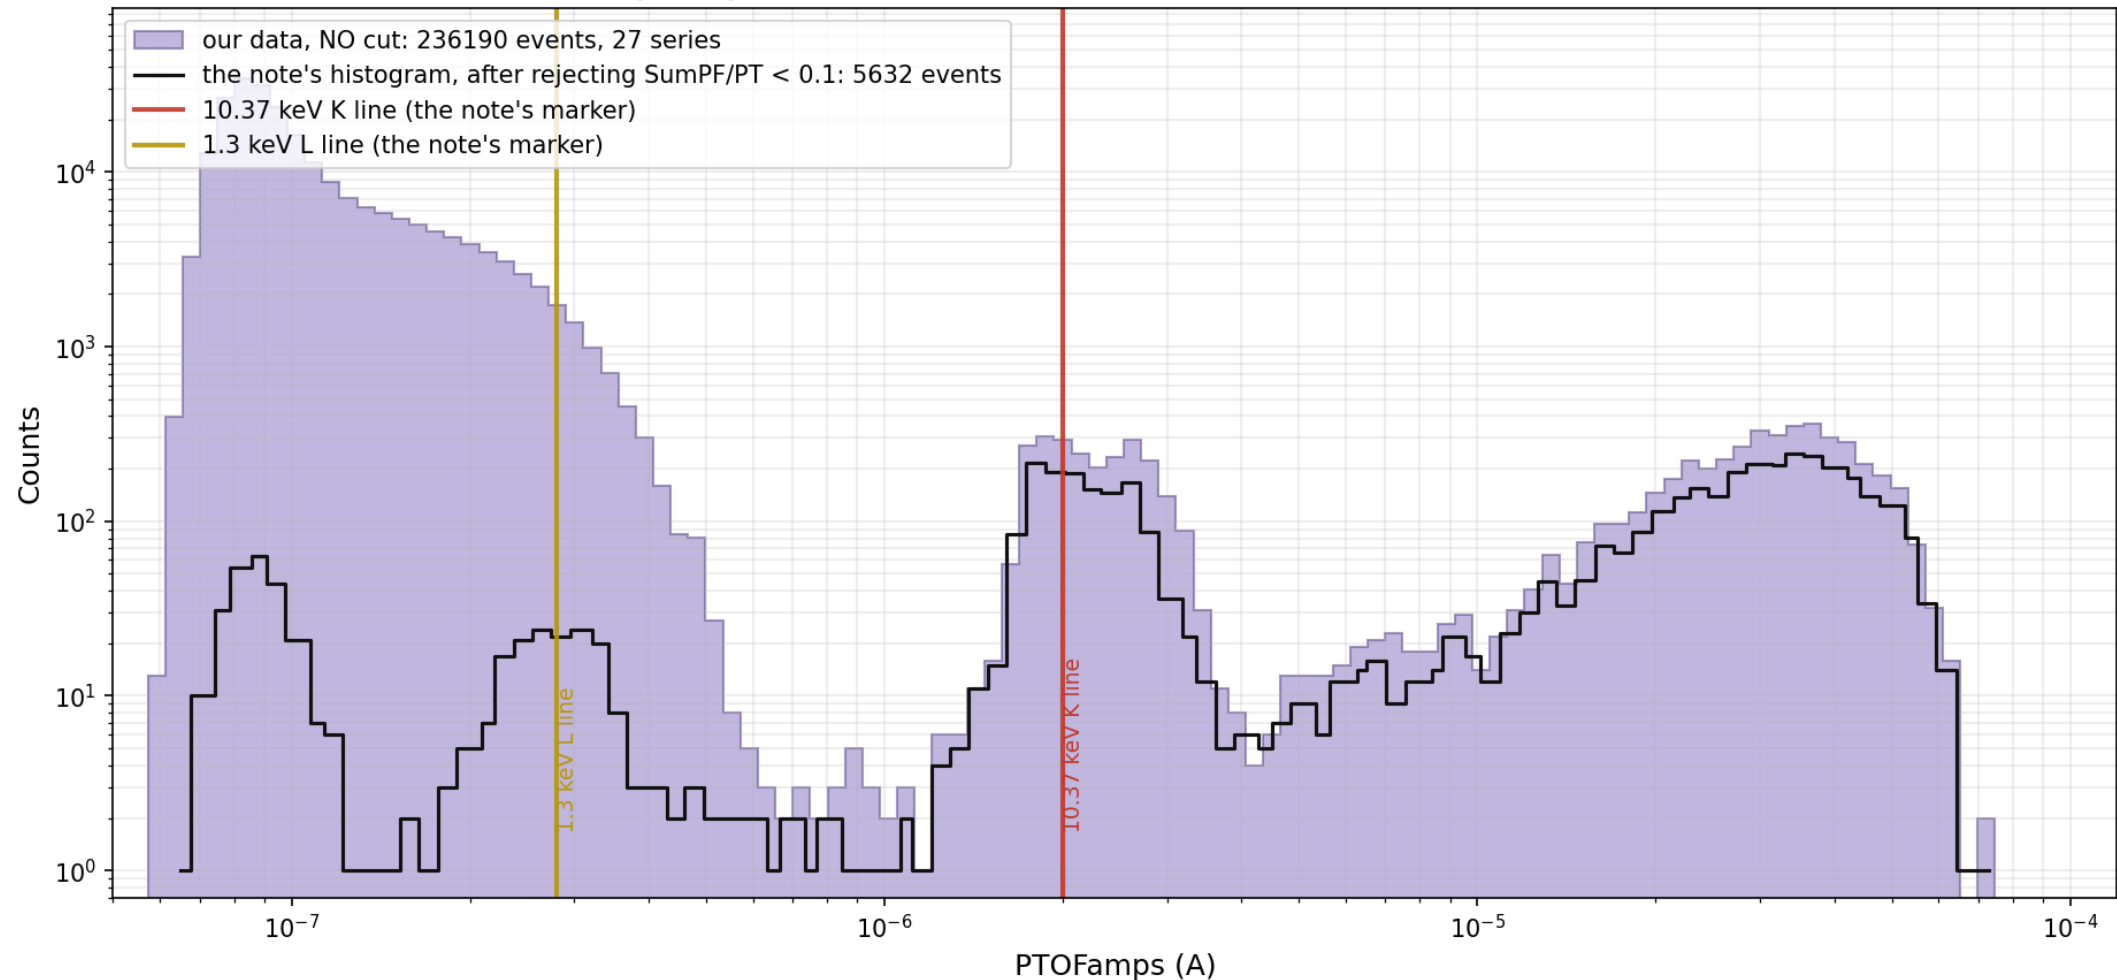

Backup — the three versions of the power formula

$\delta P = I_0(R_L - R_0) \cdot \delta I + c_2 \cdot R_L \cdot (\delta I)^2$ with $c_2 = 2$ (Method 1, used here), 1 (exact small-signal), -1 (Method 2)


Relative to the exact form: Method 1 +0.58 %, Method 2 -1.15 % in energy — far below the 15 % single-channel width and the PDS2 bracket.

The inductor term of the full equations needs L and the loop gain from dI/dV , which do not exist for these series on MSI; it is neglected.

The official Eabs (trigger bin 16383, baseline bins 93..15758, 5-pole 20 kHz prefilter, window $-0.5/+1$ ms, same formula) is reproduced to 0.2 %; the grey outlines on the histogram slides are it.


Backup — 15 events, fitted current and power (PBS1)

Z7 PBS1: fitted current pulse (dashed navy) and the power pulse it implies (red)
 Z7 24260617_063934, K-line events | method1: $P(t) = I_0(R_L R_0) \cdot dI(t) + 2 \cdot R_L \cdot L \cdot (dI(t))^2$ | bias point per channel from detectorConfig, ADC/A = 3.145728e+09
 the current is the two-exponential FIT, refitted directly in amperes (model $A[\exp(-t/\tau_r) - \exp(-t/\tau_f)]$), 5 free params, pretrigger free in 16383+-3000; the raw trace is drawn only for reference
 integration runs over the whole trace, 0 to 52.43 ms; for the fitted pulse this equals the closed-form integral, so the energy no longer depends on the window

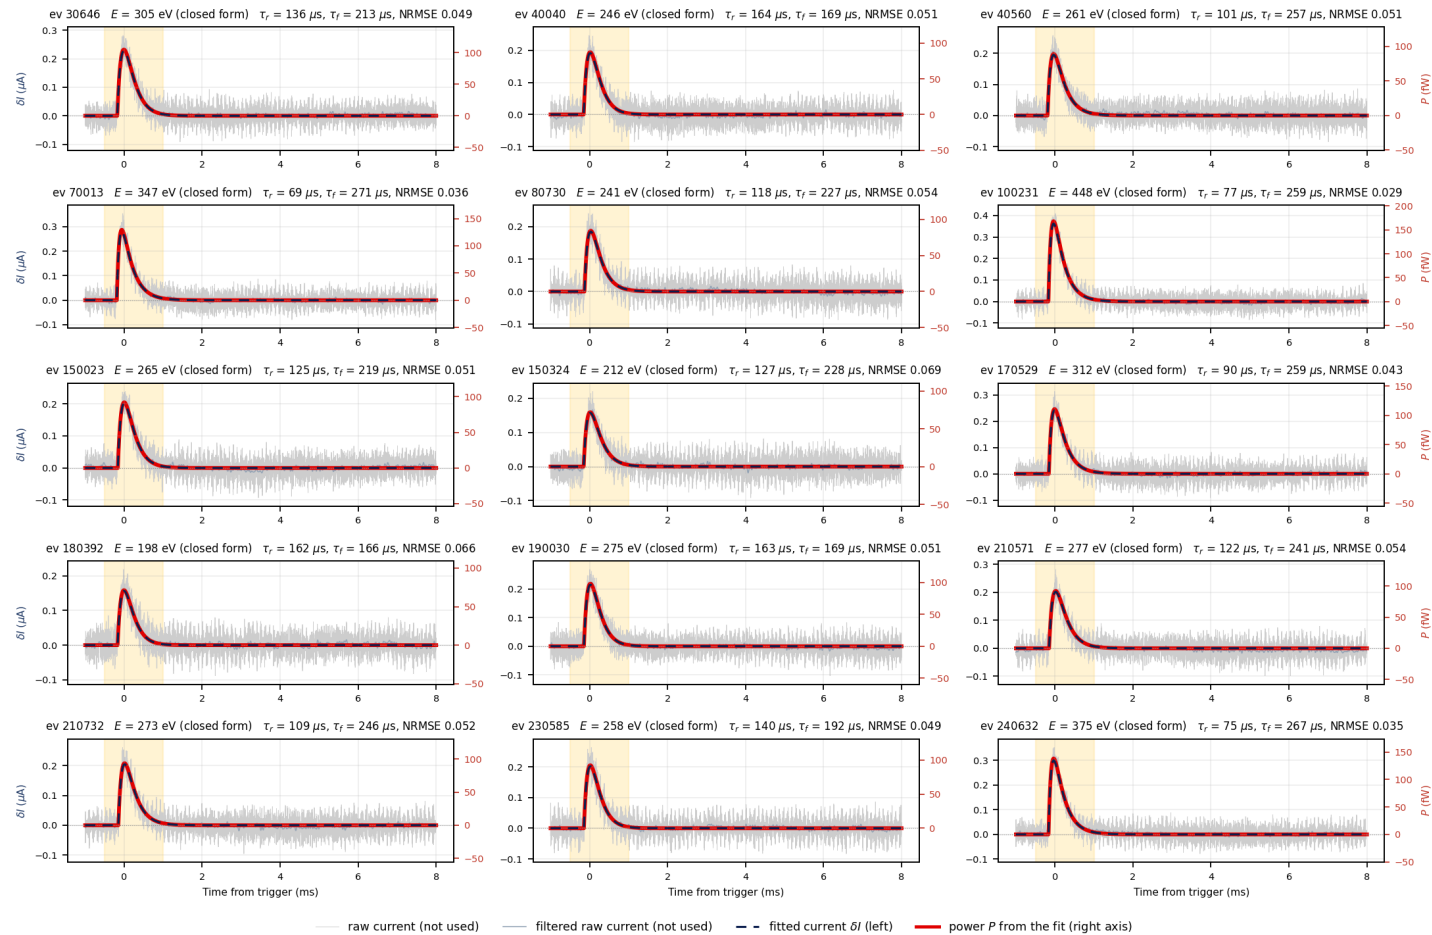


Backup — 15 events, cumulative energy (PBS1)

Z7 PBS1: integrated power = absorbed energy, fitted pulse vs raw trace
 Z7 24260617_063934, K-line events | method1: $P(t) = 10(R_L R_0) \cdot d(t) + 2 \cdot R_L \cdot L \cdot (d(t))^2$ | bias point per channel from detectorConfig, ADC/A = 3.145728e+09
 the current is the two-exponential FIT, refitted directly in amperes (model $A[\exp(-t/\tau_f) - \exp(-t/\tau_r)]$), 5 free params, pretrigger free in 16383+-3000; the raw trace is drawn only for reference
 integration runs over the whole trace, 0 to 52.43 ms; for the fitted pulse this equals the closed-form integral, so the energy no longer depends on the window

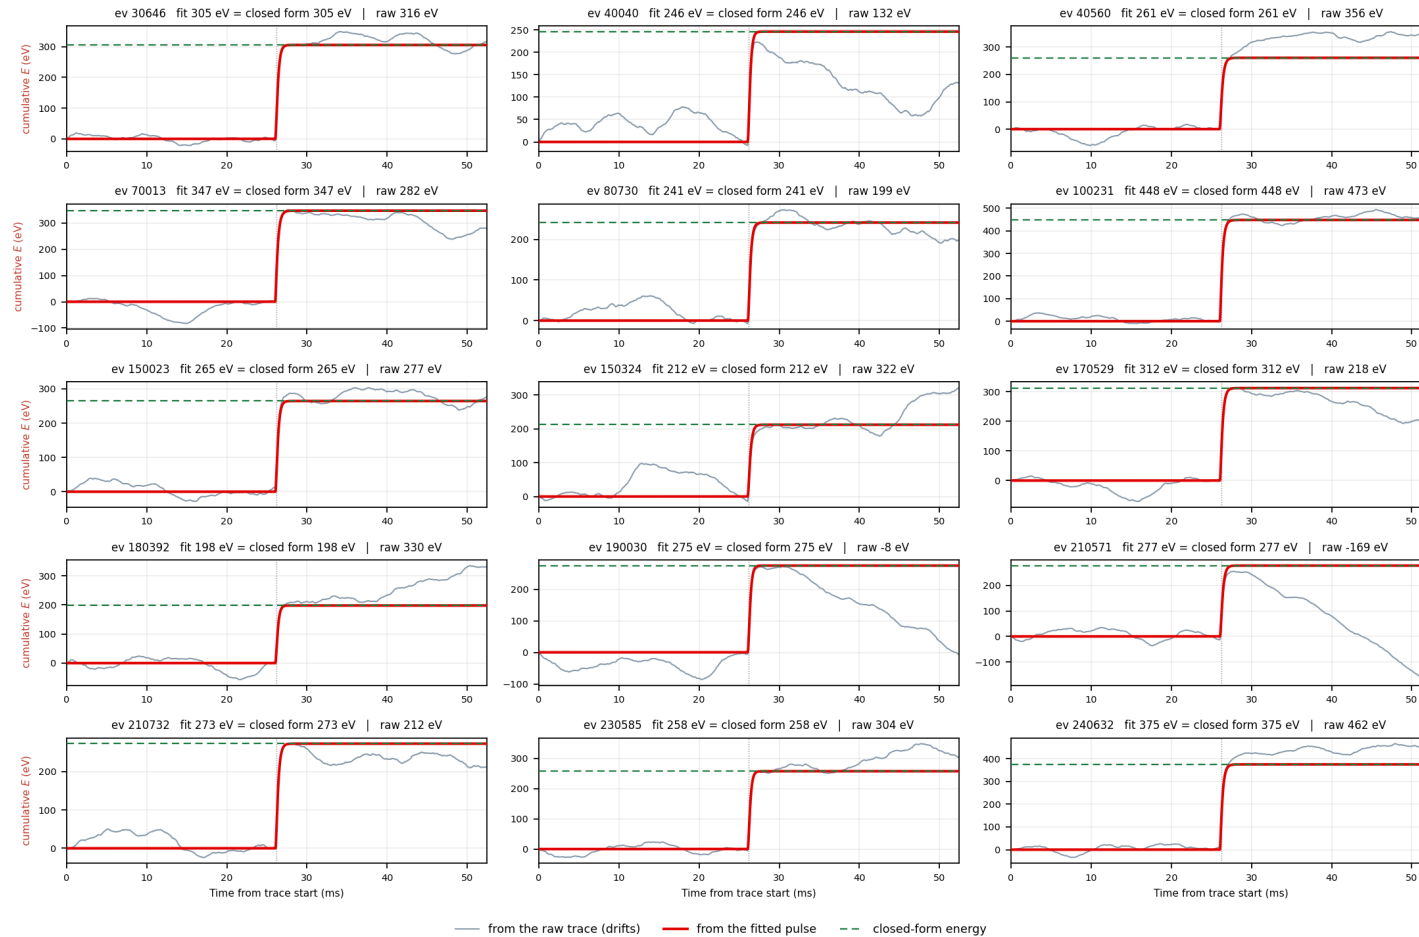

Backup — event 30646, all channels

Z7 event 30646, all channels: fitted current and power
 sum over channels from the fits: 3419 eV = 33.0% of 10.37 keV (official-window raw sum 3397 eV = 32.8%)
 Z7 24260617_063934, K-line events | method1: $P(t) = I_0(R_{L-R0}) * dl(t) + 2 * R_{L-R0} * L * (dl(t))^2$ | bias point per channel from detectorConfig, ADC/A = 3.145728e+09
 the current is the two-exponential FIT, refitted directly in amperes (model $A[\exp(-t/\tau_f) - \exp(-t/\tau_r)]$, 5 free params, pretrigger free in 16383+-3000); the raw trace is drawn only for reference
 integration runs over the whole trace, 0 to 52.43 ms; for the fitted pulse this equals the closed-form integral, so the energy no longer depends on the window

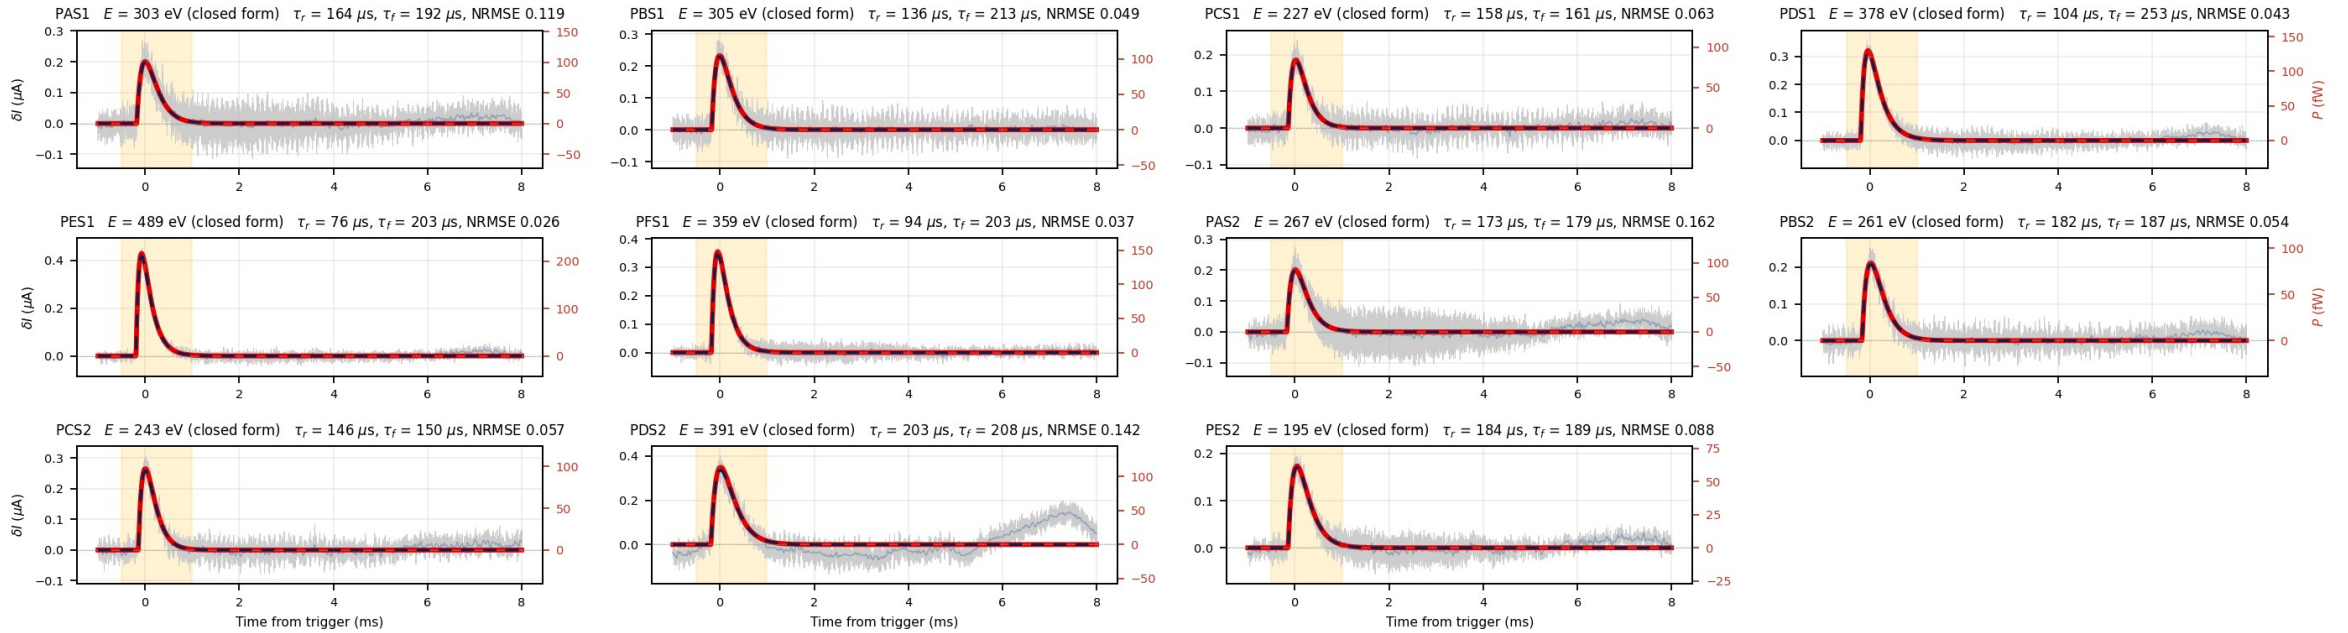

Backup — energy distribution of every channel

Z7: energy of every K-line event, one panel per channel (30 series)

each entry is one event: its trace fitted with the two-exponential and the power integrated in closed form, method1 quadratic

the dashed curve is a Gaussian fit to the core, so its centre is the PEAK; these distributions are right skewed, so peaks must not be added (the plain means do add, to 3710 eV = 35.8% of the 10.37 keV K line)

